

## STANDARD

PRESS ON BAND (POB) FOR ALL  
REGULAR WORKING CONDITIONS

A wear abrasion and tear resistant tread of a perfected natural rubber compound is vulcanized onto a precision band using a new 'global-lock' bonding process, which virtually locks the rubber to steel base bands. GLOBESTAR POB is a great cushion tire ensuring reduced downtime and increased load capacity.



**Low**  
rolling resistance

**Extended**  
tire life

**Better**  
heat dissipation

### GLOBESTAR POB is ideal for...

The perfected natural rubber compound results in,


- Low rolling resistance
- Better heat dissipation
- Cooler operating temperatures
- Extended tire life



**Lug Non-Marker**



**Smooth Black**

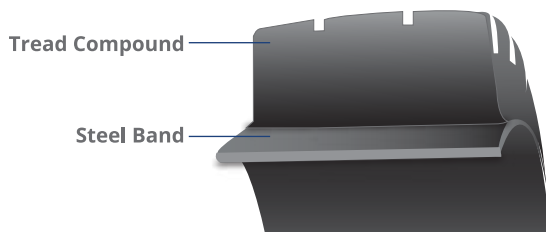

### ...high load rating with smaller tire sizes.

GLOBESTAR POB ensures performance as well as driver comfort and is available in non-marking, lug tread as well as smooth tread types that are suitable for a variety of material handling applications.



## Technical Data

Tire Size		SM	LUG	Tire load capacity on forklifts at Max. Speed			
				10 Miles/h (Lbs)		16 Km/h (Kg)	
Inch	mm			Load Wheel	Steer Wheel	Load Wheel	Steer Wheel
10x4x6 1/2	254/102-165	•		1530	1290	695	585
10x5x6 1/2	254/127-165	•	•	1995	1675	905	760
10 1/2 x5x 6 1/2	267/127-165			2113	1772	960	805
10x4 3/4x6 1/2	254/121-165			1874	1579	850	716
13 1/2x4 1/2x8	343/114-203	•		2205	1850	1000	840
13 1/2x5 1/2x8	343/140-203	•		2965	2490	1345	1130
13 1/2x6 1/2x8	343/165-203	•		3240	2710	1470	1230
12 x 4 1/2 x8	305/114-203	•	•	2072	1477	940	670
14x4 1/2x8	356/114-203	•	•	2300	1930	1045	875
14x5x10	356x127-254	•		2648	2207	1200	1000
15x5x11 1/4	381/127-286	•		2735	2305	1240	1045
15x6x11 1/4	381/152-286	•		3385	2845	1535	1290
16x5x10 1/2	406/127-267	•		2965	2490	1345	1130
16x6x10 1/2	406/152-267	•	•	3770	3165	1710	1435
16x7x10 1/2	406/178-267	•		4563	3836	2070	1740
16 1/4x5x11 1/4	413/127-286	•		3000	2525	1360	1145
16 1/4x6x11 1/4	413/152-286	•	•	3780	3175	1715	1440
16 1/4x7x11 1/4	413/178-286	•		4555	3825	2065	1735
18x5x12 1/8	457/127-308	•		3230	2710	1465	1230
18x6x12 1/8	457/152-308	•	•	4120	3470	1870	1575
18x7x12 1/8	457/178-308	•	•	5925	4220	2280	1915
18x8x12 1/8	457/203-308	•	•	5920	4970	2685	2255
18x9x12 1/8	457/229-308	•	•	6810	5720	3090	2595
21x6x15	533/152-381		•	4640	3890	2105	1765
21x7x15	533/178-381	•	•	5645	4740	2560	2150
21x8x15	533/203-381	•	•	6660	5590	3020	2535
22x8x16	559/203-406	•	•	6900	5790	3130	2625
22x9x16	559/229-406	•	•	7950	6670	3605	3025
22x12x16	559/305-406	•		11090	9315	5030	4225
	645/200-410	•		9215	7561	4180	3430
	645/250-410	•		10420	8552	4725	3878
28x10x22	711/254-559	•		10285	8290	4665	3760
28x12x22	711/305-559	•		12135	10230	5505	4640
22x16x16	559/406-406	•		13850	11640	6925	5820
40x16x30	1016/406-762	•		21610	17740	10805	8870

### LIMITED WARRANTY

All tires manufactured by Global Rubber Industries (Pvt) Ltd. are covered under limited warranty against materials, workmanship and any other manufacturing defects subjected to the usage of these tires under specified conditions. If any tire covered by this warranty is identified as unserviceable tire due to a material / workmanship / any other manufacturing defect, we will either repair the tire or make an allowance on purchase of new tire as per the current price of a new tire by the percentage of original tread worn off at the time of making the claim.

The cost of transportation, service, and sales tax already paid will be borne by the owner of the claimed tire. This limited warranty is made for the exclusive benefit of the tire owner actually using the product. No other warranty of liability, expressed or implied, is applicable to this limited warranty or to our products.

**Global Rubber Industries Pvt. Ltd.**

28, Joseph's Lane, Colombo 4, Sri Lanka.

Tel: +94112598831, Fax: +94112551091, Email: info@gritires.com

[www.gritires.com](http://www.gritires.com)



**GRI**  
Built To Move