

THE PERFORMER

VALUE

IDEAL FOR LESS DEMANDING ENVIRONMENTS

THE PERFORMER offers good value for money. It is a two-stage tire that has good tensile strength, low rolling resistance and provides a firm but smooth ride. It is excellent for light and intermittent use in all material handling applications.



Resist
abrasion


Increased
durability

Low
Rolling Resistance

THE PERFORMER lives up to its name...

While maintaining a cool running temperature, the special compound ensures;

- Low heat build-up in normal operating conditions
- Good tensile strength and durability
- A smooth and comfortable ride
- Good tire life and wear resistance

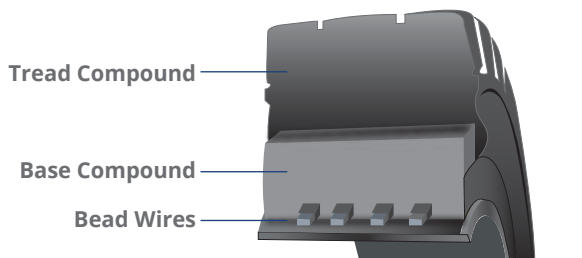

...every single time.

Our creel bead technology ensures secure and safe fitment to all forklift wheels and rims. THE PERFORMER is available in a full range of sizes in standard as well as clip-type tires.



THE PERFORMER



Technical Data

Tire Size		Rim Size	Clip on	Tire Dimensions				Tire load capacity on forklifts at Max. Speed				Profile
								12 Miles/h (Lbs)		20 Km/h (Kg)		
				Max width ±1% (mm)	OD ± 2% (mm)	Max width ±1% (inch)	OD ± 2% (Inch)	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	
4.00-8		3.00 D-8	●	105	406	4.13	15.98	2095	1610	950	730	GS
5.00-8		3.00 D-8	●	116	446	4.57	17.56	3120	2405	1415	1090	GS
15x4 1/2-8	125/75-8	3.00 D-8	●	103	377	4.06	14.84	2295	1765	1040	800	GS
16x6-8	150/75-8	4.33 R-8	●	139	407	5.47	16.02	3210	2535	1455	1150	GS
18x7-8	180/70-8	4.33 R-8	●	153	451	6.02	17.76	4730	3640	2145	1650	GS
6.00-9		4.00 E-9	●	140	520	5.51	20.47	4155	3195	1885	1450	GS
21x8-9	200/75-9	6.00 E-9	●	174	516	6.85	20.31	6075	4675	2755	2120	GS
6.50-10		5.00 F-10	●	153	565	6.02	22.24	5160	3970	2340	1800	GS
200/50-10		6.50 F-10	●	187	455	7.36	17.91	5445	4190	2470	1900	GS
23x9-10	225/75-10	6.50 F-10	●	191	579	7.52	22.80	7595	5840	3445	2650	GS
7.00-12		5.00 S-12	●	164	647	6.46	25.47	6435	4940	2920	2240	GS
23x10-12		8.00 G-12	●	234	578	9.21	22.76	8310	6390	3770	2900	GS
27x10-12	250/75-12	8.00 G-12	●	232	673	9.13	26.50	8600	6615	3900	3000	GS
7.00-15		5.50-15	●	178	705	7.01	27.76	7815	6005	3545	2725	GS
7.00-15		6.00-15	●	178	705	7.01	27.76	7815	6005	3545	2725	GS
250-15	250/70-15	7.00-15	●	214	712	8.43	28.03	10470	8045	4750	3650	GS
250-15	250/70-15	7.50-15	●	214	712	8.43	28.03	10470	8045	4750	3650	GS
8.15-15 (28x9-15)	225/75-15	7.00-15	●	209	681	8.23	26.81	8310	6390	3770	2900	GS
8.25-15		5.50-15	●	194	809	7.64	31.85	10470	8045	4750	3650	GS
8.25-15		6.50-15	●	193	809	7.60	31.85	10470	8045	4750	3650	GS
300-15	315/70-15	8.00-15	●	244	812	9.61	31.97	12895	9920	5850	4500	GS
9.00-20		6.50-20	●	225	971	8.86	38.23	11770	9810	5340	4450	GS
9.00-20		7.00-20	●	225	971	8.86	38.23	11770	9810	5340	4450	GS
10.00-20		7.00-20	●	250	1006	9.84	39.61	13230	11025	6000	5000	GS
10.00-20		7.50-20	●	250	1006	9.84	39.61	13230	11025	6000	5000	GS
10.00-20		8.00-20	●	250	1006	9.84	39.61	13230	11025	6000	5000	GS
12.00-20		8.00-20	●	265	1085	10.43	42.72	16535	13780	7500	6250	GS
12.00-20		8.50-20	●	265	1085	10.43	42.72	16535	13780	7500	6250	GS

LIMITED WARRANTY

All tires manufactured by Global Rubber Industries (Pvt) Ltd. are covered under limited warranty against materials, workmanship and any other manufacturing defects subjected to the usage of these tires under specified conditions. If any tire covered by this warranty is identified as unserviceable tire due to a material / workmanship /any other manufacturing defect, we will either repair the tire or make an allowance on purchase of new tire as per the current price of a new tire by the percentage of original tread worn off at the time of making the claim.

The cost of transportation, service, and sales tax already paid will be borne by the owner of the claimed tire. This limited warranty is made for the exclusive benefit of the tire owner actually using the product. No other warranty of liability, expressed or implied, is applicable to this limited warranty or to our products.

Global Rubber Industries Pvt. Ltd.

28, Joseph's Lane, Colombo 4, Sri Lanka.

Tel: +94112598831, Fax: +94112551091, Email: info@gritires.com

www.gritires.com



GRI
Built To Move